


MiniNeo S400


www.mininggeek.com support@mininggeek.com



Packing list



X1



X1



X4



Power supply screws

X6



Motherboard screws

X10



HDD screws

X4

Specification

Model	S400
Color	Black/White
Product size	340x155x205mm(LxWxH)
Supported motherboard	ITX (170x170mm)
Supported hard disk	2.5 SSDx1, 3.5 HDDx1
Graphics card length limit	335x140x65mm 225x140x65mm (with 3.5' HDD)
CPU cooler height	≤ 67mm
Fans	Top: Two 120x15mm, Bottom: 90x15mm
Interface	POWER, USB 3.0 x1, TYPE-C x1
Power supply	SFX/SFX-L


Installation Steps

Note:

To use the bundled (if there is one) PCIe 3.0 riser cable and if your motherboard and graphics card are of Gen 4, then connect your graphics card directly to the motherboard so that you can set BIOS to switch the PCIe port to accepting Gen 3 speed.


Step 1:

Remove side panels

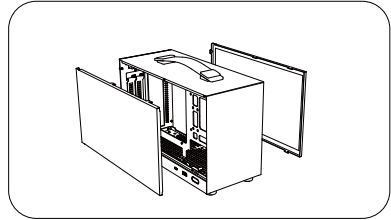


Step 3:

Install riser cable for graphics card

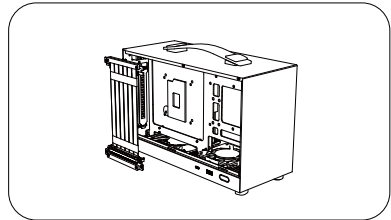


Step 2:

Install fan on the top

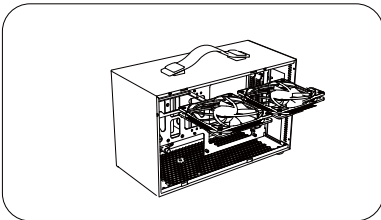


Step 5:

Install HDD

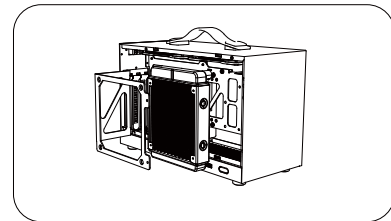


Step 4:

Install motherboard

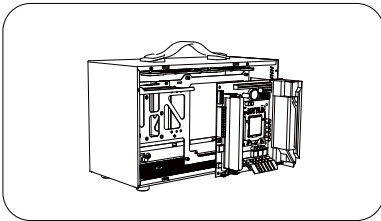

Step 7:

Install graphics card

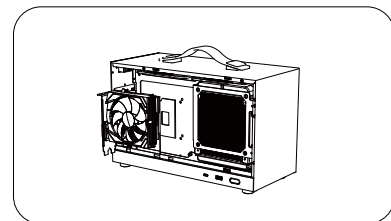

Step 6:

Install power supply

